




# DRIVESHAFT ANDERSON, INC.

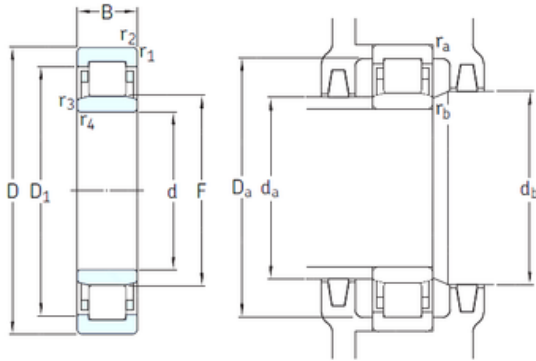

## NU1017M/HC5C3 SKF Hybrid Cylindrical Roller Bearings

Bearing No. NU1017M/HC5C3

NU1017M/HC5C3 Bearing 2D drawings and 3D CAD models

|                               |              |
|-------------------------------|--------------|
| Size                          | 85x130x22 mm |
| Bore Diameter                 | 85 mm        |
| Outer Diameter                | 130 mm       |
| Width                         | 22 mm        |
| d                             | 85 mm        |
| D                             | 130 mm       |
| B                             | 22 mm        |
| C                             | 22 mm        |
| r1 min.                       | 1,1 mm       |
| r2 min.                       | 1,1 mm       |
| r3 min.                       | 1 mm         |
| r4 min.                       | 1 mm         |
| D1                            | 114 mm       |
| F                             | 96,5 mm      |
| da min.                       | 89,6 mm      |
| da max                        | 95 mm        |
| Da max.                       | 124 mm       |
| db min                        | 99 mm        |
| ra max.                       | 1 mm         |
| rb max.                       | 1 mm         |
| S                             | 3,3 mm       |
| Weight                        | 0,95 Kg      |
| Basic dynamic load rating (C) | 72,1 kN      |
| Basic static load rating (C0) | 91,5 kN      |
| Fatigue load limit (Pu)       | 11,6         |



## DRIVESHAFT ANDERSON, INC.

|                 |            |
|-----------------|------------|
| Reference speed | 6000 r/min |
| Limiting speed  | 6000 r/min |